

RTD




R-LT's all fitted with PT100 Class A elements inside a 316 stainless steel sheath. 75mm tails with boot lace ferrules are standard for the leads.

Order Code	Length (mm)	Lead Type	Sheath OD (mm)
RLT6.4-100D1000T	1000	PVC 7/0.2 3 core	6.35 x 100
RLT6.4-100D1500T	1500	PVC 7/0.2 3 core	6.35 x 100
RLT6.4-100D2000T	2000	PVC 7/0.2 3 core	6.35 x 100
RLT6.4-100D3000T	3000	PVC 7/0.2 3 core	6.35 x 100

Order Code	Length (mm)	Lead Type	Sheath OD (mm)
RLT3-100G1000T	1000	PTFE 7/0.2 3 core	3 x 100
RLT3-100G1500T	1500	PTFE 7/0.2 3 core	3 x 100
RLT3-100G2000T	2000	PTFE 7/0.2 3 core	3 x 100
RLT3-100G3000T	3000	PTFE 7/0.2 3 core	3 x 100

RM-ET

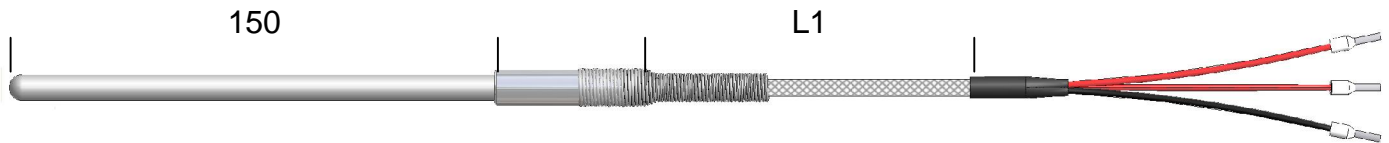

RM-ETs are fitted with PT100 Class A RTD elements. 316 stainless steel powder packed stems. RM-ETs have flexible leads with 75mm tails and boot lace ferrules as standard. Optional stainless steel relief spring available.

Order Code	Length (mm)	Lead Type	Sheath OD (mm)
RM-ET64-150D1000T	1000	PVC 7/0.2 3 core	6.35 x 150
RM-ET 64-150D1500T	1500	PVC 7/0.2 3 core	6.35 x 150
RM-ET 64-150D2000T	2000	PVC 7/0.2 3 core	6.35 x 150
RM-ET 64-150D3000T	3000	PVC 7/0.2 3 core	6.35 x 150

Order Code	Length (mm)	Lead Type	Sheath OD (mm)
RM-ET 3-150G1000T	1000	PTFE 7/0.2 3 core	3 x 150
RM-ET 3-150G1500T	1500	PTFE 7/0.2 3 core	3 x 150
RM-ET 3-150G2000T	2000	PTFE 7/0.2 3 core	3 x 150
RM-ET 3-150G3000T	3000	PTFE 7/0.2 3 core	3 x 150

*Optional Strain relief spring add "S"

RPD



RPD are a flexible all PVC probe fitted with PT100 Class A element and a water proof sealed tip.

Order Code	Length (mm)	Lead Type
RPD1000T	1000	PVC 7/0.2 3 core
RPD1500T	1500	PVC 7/0.2 3 core
RPD2000T	2000	PVC 7/0.2 3 core
RPD3000T	3000	PVC 7/0.2 3 core