


## Plastics Industry

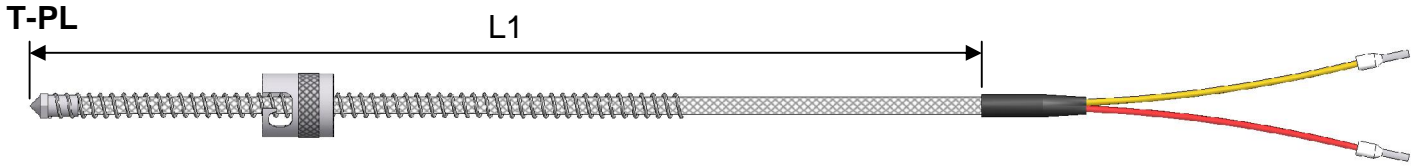


T-PLs come with adjustable bayonet cap running on 6.4mm x 300mm stainless steel spring. Fibreglass stainless steel over-braid ANSI Code.

Order Code	Length L1	Calibration
T-PL-K-1000T	1000mm	Type K
T-PL-K-1500T	1500mm	Type K
T-PL-K-2000T	2000mm	Type K
T-PL-K-3000T	3000mm	Type K
T-PL-K-4000T	4000mm	Type K

Order Code	Length L1	Calibration
T-PL-J-1000T	1000mm	Type J
T-PL-J-1500T	1500mm	Type J
T-PL-J-2000T	2000mm	Type J
T-PL-J-3000T	3000mm	Type J
T-PL-J-4000T	4000mm	Type J

### T-PL Extended Tip

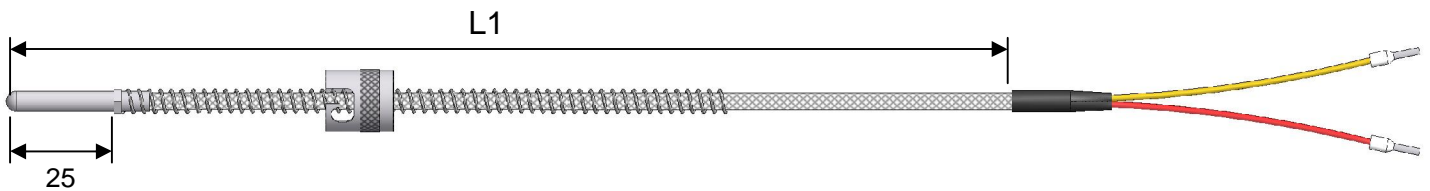


T-PL Extended Tip's have 4.5mm x 25mm tip. Fibreglass stainless steel over-braid ANSI Code. Adjustable bayonet cap running on 6.4mm x 300mm stainless steel spring. (Insulated Junction Available)

Order Code	Length L1	Calibration
T-PL-K-1000T-EXTIP	1000mm	Type K
T-PL-K-1500T-EXTIP	1500mm	Type K
T-PL-K-2000T-EXTIP	2000mm	Type K
T-PL-K-3000T-EXTIP	3000mm	Type K
T-PL-K-4000T-EXTIP	4000mm	Type K


Order Code	Length L1	Calibration
T-PL-J-1000T-EXTIP	1000mm	Type J
T-PL-J-1500T-EXTIP	1500mm	Type J
T-PL-J-2000T-EXTIP	2000mm	Type J
T-PL-J-3000T-EXTIP	3000mm	Type J
T-PL-J-4000T-EXTIP	4000mm	Type J

### Probe Options (Add to probe Order Code where required)

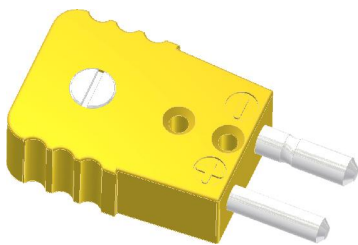

Order Code	Description
P	Plug
MP	Mini Plug
S	Socket
MS	Mini Socket
CC	Cable Clamp
	Large Inside Diameter Bayonet Caps (Drilled to suit)

### T-PL Adaptor Single Pin (Specials Available on Request)



Order Code	Length
TPLA22	22mm
TPLA35	35mm
TPLA48	48mm

\*1/8 BSP male thread

\*Length is measured from end to end